

Common CBM beam test of the RICH, TRD and TOF subsystems at the CERN PS T9 beam line in 2012 *

D. Emschermann¹, J. Adamczewski-Musch², A. Arend³, C. Bergmann¹, C. Garcia⁴, N. Heine¹, S. Linev², T. Morhardt², C. Pauly⁵, M. Petriş⁶, M. Petrovici⁶, W. Verhoeven¹, and J. P. Wessels¹

¹Institut für Kernphysik, Münster, Germany; ²GSI, Darmstadt, Germany; ³Institut für Kernphysik, Frankfurt/M, Germany; ⁴IRI, Frankfurt/M, Germany; ⁵Bergische Universität Wuppertal, Germany; ⁶NIPNE, Bucharest, Romania

A common beam test of the CBM Ring Imaging Cherenkov (RICH), Transition Radiation Detector (TRD) and Time Of Flight (TOF) subsystems was performed at the CERN Proton Synchrotron (PS) accelerator in October/November 2012. The measurements were carried out at the T9 beam line in a mixed beam of electrons and pions with momenta from 2 to 10 GeV/c. In addition to the above mentioned detectors, the setup consisted of: two Cherenkov detectors, two fiber-trackers, beam trigger scintillators and a lead-glass calorimeter. The first fiber-tracker was placed at the upstream end of the setup, followed by a large volume RICH prototype, 8 real-size TRD prototypes, 2 TOF detectors and finally the second fiber-tracker at the downstream end, see Figure 1.

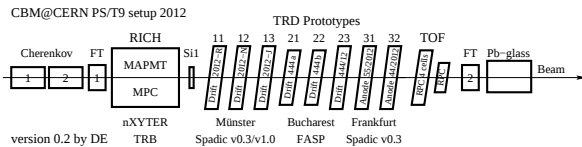
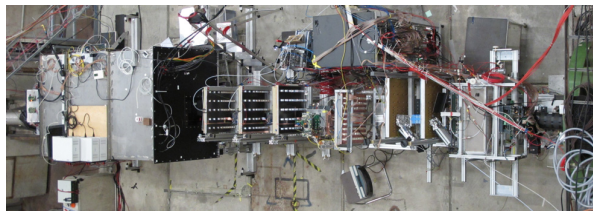


Figure 1: Setup of CBM in the PS/T9 beam line in 2012.

The RICH prototype [1] was based on a mirror focusing setup with CO₂ gas as radiator. The photon camera was composed of 4 micro channel plate (MCP) detectors plus 20 Hamamatsu multi-anode photo-multipliers (MAPMTs). Two concurrent approaches to readout the RICH camera were tested: the traditional trigger-less nXYTER front-end as well as a free streaming approach based on the HADES Trigger and Readout Board (TRB3).

The TRD laboratories in Münster [2], Bucharest [3],[4] and Frankfurt [6],[7] have built real-size (59×59 cm²) detector modules based on MWPC technology with cathode pad readout. The large size of the TRDs has triggered innovative developments to stabilize the entrance window to the gas volume, while minimizing the loss of transition radiation between the radiator and the detection volume.

* Work supported by BMBF, EU-FP7/HP3 Grant No. 283286 and NASR/CAPACITATI contract no.179

The readout of the Bucharest prototypes was based on the Fast Analog Signal Processor (FASP) ASIC, either digitized in a VME-based MAD32, or using free streaming MAXIM [5] based converters. The signal processing on the TRD modules from Münster and Frankfurt was performed with the SPADIC v0.3 from 2011. A TRD prototype from Münster served as platform to compare the performance of the FASP, the SPADIC v0.3 and the recently developed SPADIC v1.0 [8],[9]. The latter reads out 32 channels in self-triggered mode and implements the CBM-net protocol on the ASIC. The TRD test program consisted of a systematic study of different radiator prototypes with a Xe(80%)+CO₂(20%) gas mixture in the detection volume, as well as beam momentum and high voltage scans.

Bucharest completed the setup with a segmented TOF prototype, consisting of 4 partially overlapping RPC cells, combined with a single RPC cell reference TOF prototype from 2011. These 2 TOF modules were again tested using a C₂F₄H₂(90%)+SF₆(5%)+iso-C₄H₁₀(5%) gas mixture allowing for fast signal generation.

All prototypes under test were read out in a common hybrid data acquisition system based on MBS and DABC.

References

- [1] S. Reinecke et al., “Overview RICH prototype beamtest 2012 at CERN-PS”, CBM Progress Report 2012
- [2] C. Bergmann et al., “Test of Münster CBM TRD prototypes at the CERN PS/T9 beam line”, GSI Scientific Report 2012
- [3] M. Petriş et al., “e/π identification and position resolution of high granularity TRD prototype based on MWPC”, GSI Scientific Report 2012
- [4] M. Tarzila et al., “Two dimension position sensitive real size CBM-TRD protypre”, GSI Scientific Report 2012
- [5] F. Constantin et al., “FPGA Based Free Running Mode Acquisition for High Counting Rate TRD”, GSI Scientific Report 2012
- [6] E. Hellbär et al., “Construction and simulations of full-size CBM-TRD prototypes without drift region”, GSI Scientific Report 2012
- [7] P. Dillenseger et al., “In-beam performance studies of the first full-size CBM-TRD prototypes developed in Frankfurt”, GSI Scientific Report 2012
- [8] T. Armbruster et al., “SPADIC 1.0 - a Self-triggered Amplifier/Digitizer ASIC for CBM-TRD”, CBM Progress Report 2012
- [9] C. Garcia et al., “Beamtest results of the CBM TRD feature extraction using SPADIC v1.0”, GSI Scientific Report 2012