

GSI-FAIR EARLY-CAREER SCIENTIST REPORTS 2025

PhD and Master student reports
of the division Accelerator Operations and Development



GSI-FAIR EARLY-CAREER SCIENTIST REPORTS 2025

PhD and Master student reports
of the division Accelerator Operations and Development

Imprint

Published and printed by
GSI Helmholtzzentrum für Schwerionenforschung GmbH,
Planckstr. 1, 64291 Darmstadt, Germany

Editors: Arnaud Le Fèvre, Yvonne Leifels.

Publication date: June 2026
GSI Report 2026-2, DOI: 10.15120/GSI-2026-00778, license: ccby4
Contact: gsilibrary@gsi.de

Contents

1.	Machine Studies at the ESR	3
1.2	Motivation	3
1.3	Method	3
1.4	Measurement Procedure.....	3
1.5	Results	3
1.6	Outlook.....	3
2.	Beam Optics Studies at the ESR	5
2.2	Problem Statement	5
2.3	Theoretical Basis.....	5
2.4	Measurements.....	5
2.5	Results	6

1. Machine Studies at the ESR

Head: B. Lorentz

Author: A. Sherjan, G. Franchetti, J. Rausch, A. Heinz, B. Lorentz, O. Chorniy

1.1 Motivation

The ESR, as a decelerator and storage ring, covers a broad spectrum of ion species and energies for various experiments [1]. Improving the deceleration efficiency will open up a whole new range of experimental possibilities for the future. For this purpose in the Machine Development (MD) 2024, first measurements were carried out to characterize beam losses during deceleration. There, the closed orbit (CO) was measured throughout the entire cycle, showing significant CO swings during the ramp. These CO swings indicate an asynchronization between the ESR cavities and magnets, which results in a continuous change of $\delta p/p$ over the deceleration ramp. A later analysis of the data has shown, that determining $\delta p/p$ as a function of time, requires a more accurate knowledge and description of the present machine and its optical functions, especially of the Dispersion [2]. Therefore, in the MD 2025 a major focus on beam optics to improve the lattice model has been undertaken [3]. This included measuring the horizontal Dispersion at the position of the 12 Beam Position Monitors (BPMs).

1.2 Method

At each BPM the measured CO, X_{CO} , can be described as a composition of an initial CO distortion, X_0 , due to small perturbations in the lattice and a dispersive term, $D_x(s) \times \delta p/p$, namely $X_{CO}(s) = X_0(s) + D_x(s) \times \delta p/p$. The Dispersion is therefore obtained with the difference in CO divided by the difference in $\delta p/p$, which in case of nonlinearities can be composed of higher-order terms:

$$D_x(s) = \frac{\Delta X_{CO}(s)}{\Delta (\delta p/p)} = D_{x,0}(s) + D_{x,1}(s) \times \delta p/p + D_{x,2}(s) \times (\delta p/p)^2 + \dots \quad (1)$$

1.3 Measurement Procedure

The CO of the beam was stored at injection energy for several $\delta p/p$ by changing the frequency of the cavity.

1.4 Results

The left-hand side of Figure 1 shows the measured Dispersion at the position of the BPMs. Looking at one BPM, each point represents the Dispersion resulting from a different $\Delta(\delta p/p)$. If the Dispersion would be independent of $\delta p/p$, each curve would be constant, but instead here they can be fitted with a polynomial function, which reveals the existence of high order terms of the Dispersion. For reference on the right-hand side the square markers show the zero order Dispersion, $D_{x,0}$, at each BPM from the nonlinear fit, see Equation 1.

Note that the first 2 BPMs break the ESR symmetry, because they are so much off compared to the rest, but the origin of it is not clarified yet.

1.5 Outlook

High order Dispersion might have an impact on the deceleration bucket and ultimately on the deceleration efficiency. Therefore, the measurements need to be repeated for different energies along the cycle to check for changes in the Dispersion terms and incorporate possible differences into the deceleration studies.

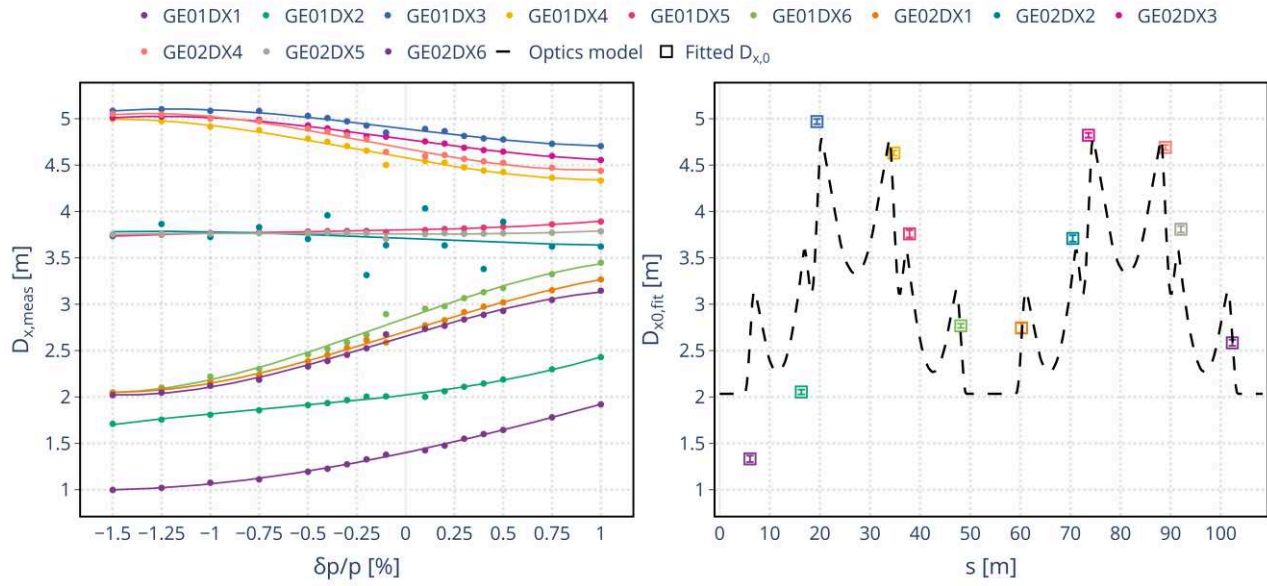


Figure 1: Left: Horizontal Dispersion as measured at the 12 BPM positions. Each point symbolizes the Dispersion as computed from eq. 1 for different $\delta p/p$. Right: For comparison, the theoretical Dispersion from the optics model (black) and the Dispersion $D_{x,0}$ (square) from a nonlinear fit are also depicted.

2. Beam Optics Studies at the ESR

Head: B. Lorentz

Author: A. Heinz, Areso Sherjann, Giuliano Franchetti, Bernd Lorentz (GSI Darmstadt) and Julian Rausch (Goethe University Frankfurt)

2.1 Problem Statement

The goal of the measurement campaign was to acquire experimental data that can be used to reduce the existing deviations between simulated and measured betatron tunes at the ESR.

As an illustrative example, one measurement yielded horizontal and vertical tunes of

$$Q_x = 2.2972$$

$$Q_y = 2.2260$$

whereas the corresponding simulation predicted

$$Q_x = 2.3511$$

$$Q_y = 2.3073.$$

This results in tune deviations of

$$\Delta Q_x = 0.0539$$

$$\Delta Q_y = 0.0813$$

which correspond to relative deviations of approximately 3%.

The data obtained from the measurement campaign were used to determine scaling factors for the ESR quadrupole strengths in order to reduce these tune deviations to values on the order of 0.01 or below.

2.2 Theoretical Basis

A proper understanding of the present problem requires the relation between the betatron tune and the quadrupole focusing strength.

The betatron tune is defined as

$$Q = 1/(2\pi) \oint_C \beta^{-1}(s) ds \quad (2) \quad [4].$$

In the linear (small-perturbation) approximation, a change in the quadrupole strength Δk produces a tune shift

$$\Delta Q = \frac{1}{4\pi} \beta \Delta k L \quad (3) \quad [5],$$

where β is the beta function at the quadrupole position and L is the quadrupole length.

The normalized quadrupole strength is defined as

$$k = 1/(B\rho) \quad (4)$$

where $B\rho = p/q$ denotes the magnetic rigidity.

2.3 Measurements

Equation (3) provides a straightforward method for optimizing the quadrupole strengths.

By performing tune measurements for different quadrupole settings, the measured tune shifts can be related to the corresponding changes in quadrupole strength. This makes it possible to determine effective beta functions at the quadrupole locations. During the measurement campaign, each ESR quadrupole family was varied individually by approximately $\pm 2\%$

around its nominal strength. For each family, ten different k-values within this range were tested. For every setting, three tune measurements were performed. In total, this resulted in approximately 300 measurements.

This systematic variation enables a direct comparison between measurement and simulation and allows the determination of effective scaling factors for the quadrupole strengths.

2.4 Results

The quadrupole scaling factors were determined using the Differential Evolution (DE) algorithm, a population-based global optimization method. DE is a derivative-free optimization technique and is robust against convergence to local minima [6].

By applying this method to the measurement data, the simulated optics model was adjusted to better represent the actual machine. The improvement achieved by this optimization is summarized in Table 1.

	Before Correction	After Correction
$ \Delta Q_x $	0.0542	0.0002
$ \Delta Q_y $	0.0810	0.0003

Table 1: Comparison of simulation and measurement before and after applying correction factors to the ESR quadrupoles. $|\Delta Q|$ denotes the absolute difference between measured and simulated tunes.

A more detailed description of the data analysis and optimization procedure can be found in the author’s Master’s thesis [7].

References

[1] B. L. et. al., “ESR operation in 2025,” GSI, 2026.

[2] A. S. et. al., “Machine studies at the ESR,” GSI, 2025.

[3] A. H. et. al., “Beam optics studies at the ESR,” GSI, 2026.

[4] S. Lee, *Accelerator Physics (Fourth Edition)*. World Scientific Publishing Company, 2018. doi: 10.1142/11111.

[5] V. Kain, “Beam dynamics and beam losses – circular machines,” *CERN Yellow Reports*, pp. Vol 2 (2016): Proceedings of the 2014 Joint International Accelerator School: Beam Loss and Accelerator Protection, 2016, doi: 10.5170/CERN-2016-002.21.

[6] S. Das and P. N. Suganthan, “Differential evolution: A survey of the state-of-the-art,” *IEEE Transactions on Evolutionary Computation*, vol. 15, no. 1, pp. 4–31, 2011, doi: 10.1109/TEVC.2010.2059031.

[7] A. Heinz, “Beam-based optimization of the ESR linear optics model,” Master’s thesis, Goethe University Frankfurt, 2026.

GSI is a member of the largest national non-university science organization, the Hermann von Helmholtz Association of German Research Centres (e.V.), in the contributions to solve big and pressing questions of society, science and economy in a total of six research areas: energy, earth and environment, health, key technologies, matter, traffic and space. GSI is researching in the research field of matter of the program-oriented research of the Helmholtz Association. At the GSI, basic research is applied, but also application-oriented research in the disciplines of hadron and nuclear physics, nuclear astrophysics, atomic physics, plasma physics, materials research as well as biophysics, radiation biology, space research, and medical technology.

GSI Helmholtz-Zentrum für Schwerionenforschung GmbH operates a worldwide unique one accelerator system for ion beams with adjoining experimental equipment. The purpose of GSI is to promote science and research, in particular through the development, construction and operation of accelerator systems for Hadron and ion beams as well as basic and applied research on the areas of science, materials science, and life sciences. For the future sees GSI the realization and use of the Facility for Antiproton and Ion Research (FAIR) in international cooperation as the most urgent goal. Partners of GSI are the Federal Republic of Germany with 90%, the country Hesse with 8%, the Free State of Thuringia with 1% and the Land Rhineland-Palatinate with 1% shares. The Helmholtz institutes in Jena and Mainz become 90% external branches of GSI funded by the federal government and 10% by Thuringia and Rhineland-Palatinate. On behalf of the German Federal Ministry of Research, Technology and Space (BMFTR), the GSI is German Shareholder of the Facility for Antiproton and Ion Research in Europe, founded in 2010 GmbH (FAIR GmbH), in cooperation with nine partner countries - Germany, Finland, France, India, Poland, Romania, Russia, Sweden, and Slovenia - as well as the United Kingdom as associated partner - first the construction and later the operation of the FAIR plant in Darmstadt is tracked.

